




ISO:	SPECIAAL
HV10:	1.550
N/mm²:	2.600



D mm	Asgat mm	Pengaten max	Z	K mm	P mm	α	β	Artikelnummer
250	20	12.000	20	2,2	1,4	15°	10° ATB	298.250.20H
250	25,4	12.000	20	2,2	1,4	15°	10° ATB	298.250.20



Schulpzagen voor handcirkelzaagmachines



290

TOEPASSING: schulpen en relatief grof afkorten.
MACHINES: handcirkelzaagmachines.
MATERIAAL: alle houtsoorten.

ISO:	K10
HV10:	1.765
N/mm²:	2.150

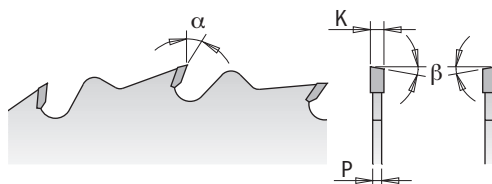

D mm	Asgat mm	Pengaten 	Z	K mm	P mm	α	β	Artikelnummer
150	20		12	2,4	1,4	20°	10° ATB	290.150.12H
160	16		12	2,2	1,6	20°	10° ATB	290.160.12E
160	20	2/6/32	12	2,2	1,6	20°	10° ATB	290.160.12H
180	30	2/7/42	12	2,6	1,6	20°	10° ATB	290.180.12M
190	16	2/6/32	12	2,6	1,6	20°	10° ATB	290.190.12E
190	20	2/6/32	12	2,6	1,6	20°	10° ATB	290.190.12H
190	30	2/7/42	12	2,6	1,6	20°	10° ATB	290.190.12M
200	30	2/7/42	24	2,8	1,8	20°	10° ATB	290.200.24M
210	30	2/7/42	24	2,8	1,8	20°	10° ATB	290.210.24M
216	30	2/7/42	24	2,8	1,8	-5° Neg.	15° ATB	290.216.24M
220	30	2/7/42	24	2,8	1,8	20°	10° ATB	290.220.24M
230	30	2/7/42	24	2,8	1,8	20°	10° ATB	290.230.24M
235	25		24	2,8	1,8	20°	10° ATB	290.235.24L
235	30	2/7/42	24	2,8	1,8	20°	10° ATB	290.235.24M
240	30	2/7/42	24	2,8	1,8	20°	10° ATB	290.240.24M
250	30	COMBI3	24	2,8	1,8	20°	10° ATB	290.250.24M*
260	30	COMBI3	28	2,8	1,8	20°	10° ATB	290.260.28M*
270	30	2/7/42	28	2,8	1,8	20°	10° ATB	290.270.28M*

* Industriële kwaliteit